

## CIRCA II RGB & CCT SMART PENDANT

SKU# 020580, 020582, 020582, 020583

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality Lucci product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this luminaire. Please keep instructions for future reference.

### Warranty

- This luminaire is covered by a 12 month warranty. The warranty is from date of purchase, not the date of installation.
- If the luminaire is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of installation by a licensed electrician for any warranty enquiries.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.
- This luminaire is not suitable for use with wall switch dimmers. Warranty will be void if the luminaire is used on the same circuit that has a wall switch dimmer. Dimming of this luminaire is done via the Lucci Connect app.

### Installation Requirements

- Must be assembled and installed by a licensed electrician.
- All wiring and installation of the luminaire must adhere to the latest local and national wiring rules. eg. AS/NZS 3000 Electrical installations.
- This luminaire is a Class I product and must be earthed during wiring and installation.
- Select a suitable location for installation:
  - This luminaire is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the luminaire.
- Dimming of this luminaire is done via the Lucci Connect app. This luminaire is not suitable for use with a wall switch dimmer. Warranty will be void if the luminaire is used on the same circuit that has a wall switch dimmer.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the luminaire has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

### Installation Directions

1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. If assembly is required, place the luminaire on a smooth non-scratch surface.
2. Remove the mounting bracket by loosening the screws from the side of the canopy. Use the mounting bracket as a template to mark the screw positions on the ceiling. (Fig. A)
3. Install the mounting bracket onto the ceiling by using appropriately sized mounting screws and anchors. Ensure the screws and anchors used are suitable for the mounting surface and the surrounding environment. (Fig. A)
4. Connect the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed. (Fig. B)

#### Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue

Live – Brown


#### Luminaire Wire / Terminal Block

Yellow/Green or 

Blue or N

Brown or L

5. Install the canopy & luminaire back onto the mounting bracket and secure by tightening the screws on the side. (Fig. C)
6. Switch on the circuit and ensure there is power to the luminaire. (Fig. D)
7. Refer to the user guide about pairing the luminaire with the Lucci Connect app.

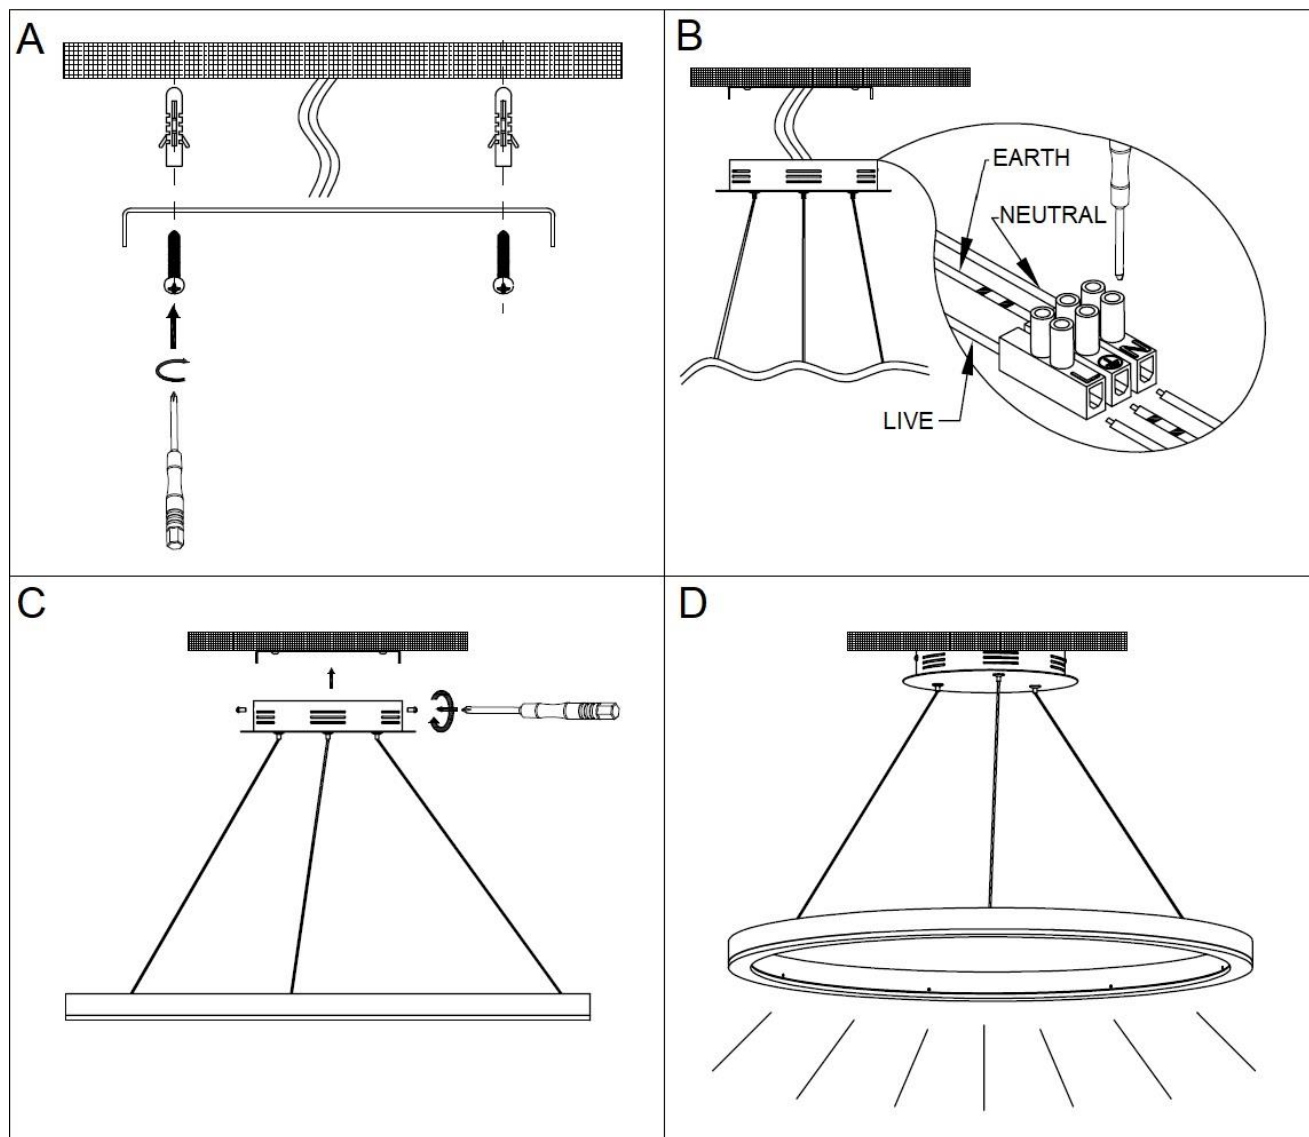

## Safety Tips

- Always ensure the power is OFF and the luminaire has cooled down before performing any maintenance, cleaning or making any adjustment to the luminaire.
- To avoid injury or damage to the luminaire, ensure that power leads and screws are secure before connecting the power.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced. There are no serviceable parts, do not attempt to dismantle or open the luminaire.
- To clean, wipe with a damp clean cloth. Do NOT soak or immerse the luminaire in water or other liquids.
- Ensure that the luminaire does not come in contact with corrosive chemicals/solvents or abrasive cleaners etc.

Specifications				
SKU #	020580	020581	020582	020583
Colour	Black	White	Black	Black
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	28W	32W		36W
LED Specs	RGB + Colour Switching 3000K-5000K			
Rated Lumens	1600 max lumens	1800 max lumens		2200 max lumens
Weight	1.9kg	2.3kg		2.9kg
Dimensions	H:30mm Dia:450mm Susp:2000mm	H:30mm Dia:600mm Susp:2000mm		H:30mm Dia:800mm Susp:2000mm